

TB215R FULL HYDRAULIC COMPACT EXCAVATOR

SPECIAL FEATURES

EVOLUTION OF TECHNOLOGY




- Powerful Yanmar Engine (10.9 kW)
- Short tail machine
- Boom cylinder is located behind the boom
- Retractable under carriage
- Accumulator (option)
- One way or two way switching for auxiliary circuit return line (option)

SAFETY

- Audible and visual warning with LCD monitor
- Front and rear mounted lights
- ROPS / FOPS cab (FOPS LEVEL 1 : standard / Level 2 : option)
- Boom holding valve (option) / Arm holding valve (option)

EASE OF OPERATION

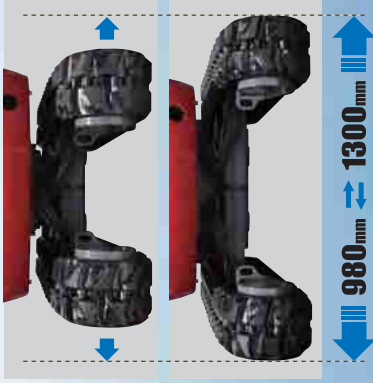

■ THE TB215R HYDRAULICALLY ADJUSTABLE TRACK FRAME enables the excavator, when in the retracted position, to squeeze through narrow openings. In the wide position, the excavator gains added stability for heavy excavating, over the side digging, attachment operation and work on uneven terrain. The advantages of two sizes of excavators in single machine.

EVOLUTION OF TECHNOLOGY

- Three auxiliary flows
- Service port 1 : Standard by pedal control
- Service port 2 : Proportional control at right hand lever (option)
- Service port 3 : Trigger at left hand lever and foot switch for quick coupler(option)
- 2-Way Control Lever (Changeable Joystick Configuration) (option)



EVOLUTION OF TECHNOLOGY



SERVICEABILITY

- Wide Open Engine Cover
- Sight Gauges for Fuel and hydraulic Fluid Levels
- Easier Access to Radiator



OPTIONS

- Service port 2 / Service port 3
- Boom holding valve / Arm holding valve
- Travel alarm
- Accumulator
- Double air cleaner element
- 2-Way Lever
- Long Dozer Blade

EVOLUTION OF TECHNOLOGY